

DOUBLE ACTING SCAFFOLD HOOKS

Double action scaffold hooks are available as part of an energy absorbing lan arrest device via karabiner. The large opening allows workers to attach the hooks to wider and more varied anchorage points.

FEATURES & BENEFITS


- Ultimate tensile strength 23kN
- Made from plated steel
- Smooth edges preventing snags
- Easy to operate with one hand

INDUSTRIES & APPLICATIONS


- Any work at height application
- EWP work
- Scaffolding
- Tower Work
- Construction
- Maintenance
- Work positioning & restraint applications

STANDARDS

- Refer to AS/NZS 1891.4 for information on anchorage selection and strength

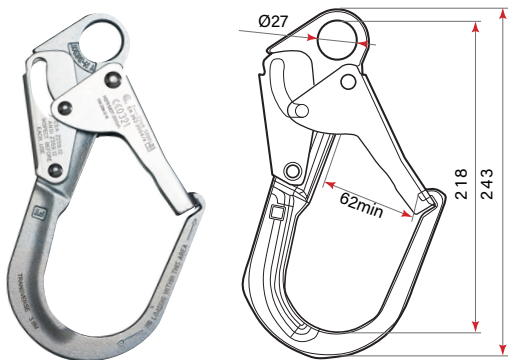

M1030004

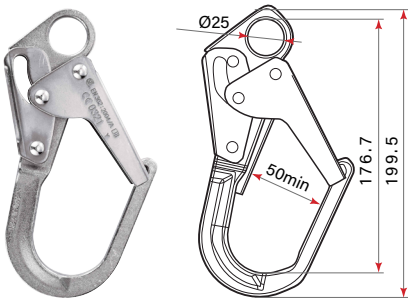

M1030003

ORDERING INFORMATION

PART NO.	DESCRIPTION	CAT	CONNECTOR NET WEIGHT	TOTAL WEIGHT	PACKAGING	PACKAGE DIMENSIONS
M1030003	Scaffold hook 50mm opening	A	800g	823.3g	25 each/box	415x350x330mm
M1030004	Scaffold hook 62mm opening	A	514g	537.3g	30 each/box	415x350x330mm

Australia and New Zealand
For More Information
www.pipglobalsafety.com | [Contact us](#)

