

Miller DuraHoist™ Vehicle Hitch Mount Extensions

Model: DH-13 (2-ft.), DH-13/4FT (4-ft.)

Description

The 2-ft. and 4-ft. Vehicle Hitch Mount Extensions (DH-13 and DH-13/4FT) install between the Vehicle Hitch Mount Sleeve (DH-12) and the attendant vehicle. The extensions allow the attendant's vehicle to be parked further away from the entry point.

Materials



General Construction:	Welded Steel
Weld Certification:	AWS
Finish:	Zinc Plated
Hardware:	Gr.5, Gr.8 - Zinc Plated
Plating Specification:	ASTM Designation B633-85, Type II, SC2

Technical

Working Load:	450lbs (204kg) working
Design Factor:	Dependent on other system components, minimum 4:1
	Design Factor
Proof Load:	90,000 in-lbs (10,200 N.m)
Weights	
DH-13:	17 lbs (7.7kg)
DH-13/4FT:	29 lbs (13.2 kg)

Application Restrictions

1. This device is intended for use with equipment and accessories manufactured and/or approved by Miller. Accessories are subject to various application restrictions as outlined in the application accessory specifications sheets.
2. Only one extension at a time is to be used with a hitch mounting sleeve. Multiple Hitch Mount Sleeve Extensions are not to be used.
3. Anchoring to an attendant vehicle may not be permitted within certain jurisdictions. Ensure that use of this equipment does not violate any regulations within your area.
4. Each installation must be approved to local standards by a qualified engineer.

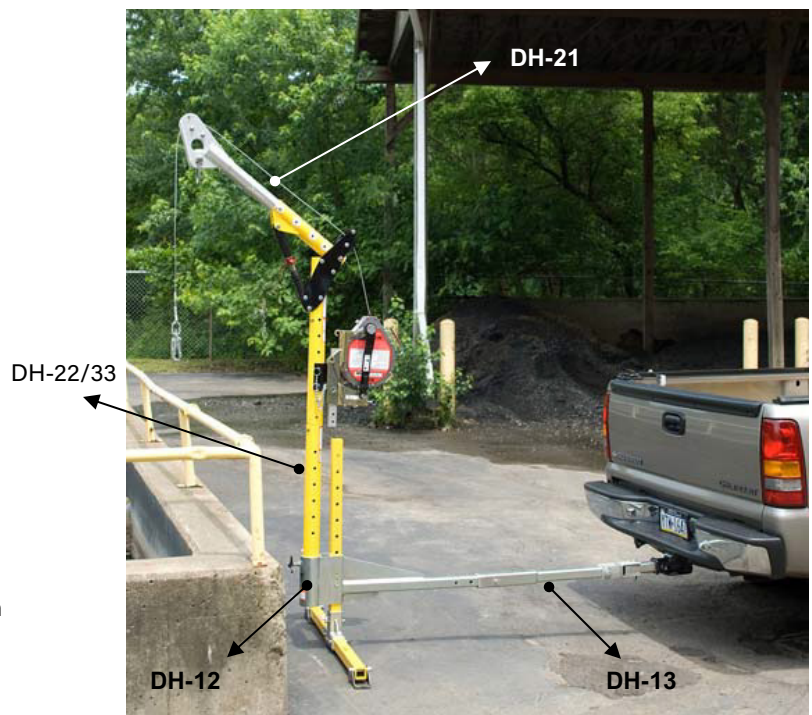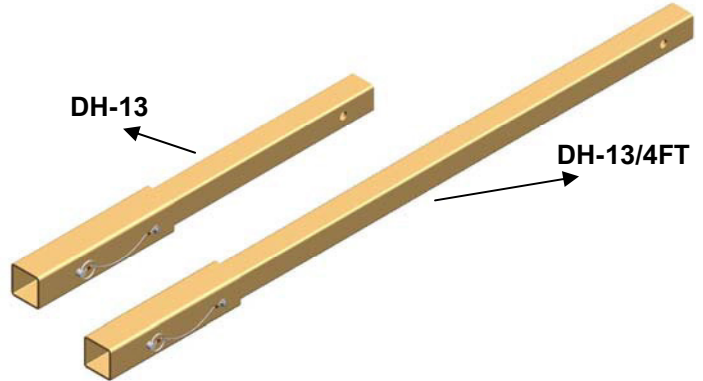

2-ft. Vehicle Hitch Mount Extension (DH-13) installed between Vehicle Hitch Mount Sleeve (DH-12) and attendant vehicle:

Vehicle Hitch Mount 2-ft. Extension (DH-13) shown with the Vehicle Hitch Mount Sleeve (DH-12), 12-in. – 29-in. Two-Piece Adjustable Upper Mast (DH-21) and Lower Mast Extension (DH-22/33)

AUSTRALIA AND NEW ZEALAND

For More Information

www.pipglobalsafety.com | [Contact us](#)

PIP
GLOBAL SAFETY