



Miller TurboLite Personal Fall Limiter and Twin Turbo Fall Protection System



- Available in 6- and 9-foot lengths
- Lightweight units minimize worker fatigue
- Arrests a fall within inches
- Twin Turbo offers 100% tie-off fall protection

Miller TurboLite Personal Fall Limiters (PFL)

Never Need A Shock-Absorbing
Lanyard Again!

Cost-effective, compact and lightweight, Miller TurboLite Personal Fall Limiters make the need for shock-absorbing lanyards obsolete.

- Reduces fall clearance requirements
- Available in 6-ft and 9-ft lengths to meet the needs of a wide variety of applications
- Extremely compact and lightweight, comparable to a shock-absorbing lanyard
- Attaches directly to the back D-ring of a harness for increased mobility
- High-impact nylon housing and abrasion-resistant webbing provide long service life
- Integral swivel prevents lifeline from twisting
- Rated for up to a 400 lb. (181.4 kg) worker
- Twin models available for 100% tie-off
- Meets all applicable OSHA, ANSI, and CSA requirements.



The benefits address your safety concerns and positively impact your bottom line:

- Workers no longer need to "switch-out" equipment to maintain a safe fall distance
- Using the proper equipment when fall clearance changes reduces risk
- Increases productivity by keeping workers on the job longer
- Miller Turbolite PFLs are competitively priced with shock-absorbing lanyards keeping safety costs in line



6-foot length

Miller 6-foot
TurboLite

- Ideal replacement for a 6-ft shock-absorbing lanyard
- Models start at just 1.9 lbs (0.86 kg)




9-foot length

Miller 9-foot
TurboLite PFL

- Provides 9-ft of working length, an ideal solution for scaffolding and order picker applications
- Lightest 9-ft unit on the market – Models start at just 2.3 lbs (1.0 kg)

Effective solution for applications with limited fall clearance.

The unique 6-foot (1.8 m) and 9-foot (2.74 m) TurboLite PFLs require less fall clearance than traditional shock-absorbing lanyards instantly arresting a free fall within inches.

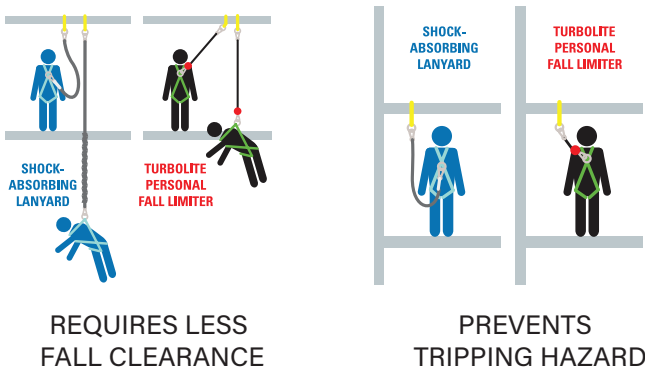

Miller TurboLite Personal Fall Limiters (PFL)

THE RIGHT CONFIGURATION

with more than 75 different options, there is a Miller TurboLite perfect for the job at hand.

- Lightweight aluminum connectors reduce weight while maintaining the strength needed to support workers
- Unit and lanyard end connector combinations available for both 9-foot and 6-foot TurboLite PFLs



Unit Connectors



Steel Carabiner;
1" (25.4 mm)
Gate Opening



D-Ring Swivel Hook
3/8"(9.5 mm) Gate



Aluminum Carabiner;
3/4" (19.1 mm)
Gate Opening



Snap Hook;
3/4" (19.1 mm)
Gate Opening



Without Unit
Connector

Lanyard End Connectors



Snap Hook;
3/4" (19.1 mm)
Gate Opening



Aluminum Snap Hook;
3/4" (19.1 mm)
Gate Opening



Rebar Hook;
2-1/2" (63.5 mm)
Gate Opening



Aluminum Rebar Hook;
2-1/2" (63.5 mm)
Gate Opening



Swivel Snap Hook;
3/4" (19.1 mm)
Gate Opening



Swivel Rebar Hook
2-1/2" (63.5 mm)
Gate Opening

MILLER TURBOLITE PERSONAL FALL LIMITER

	UNIT CONNECTOR	LANYARD END CONNECTOR
9-FT. MODELS		
MFL-12-Z7/9FT	Aluminum Carabiner	Aluminum Rebar Hook

6-foot TurboLite Specifications


MATERIALS	
Housing:	High-impact Nylon
Webbing:	Vectran core, polyester jacket 1" wide x 0.06" thick (25.4 mm x 1.5 mm)
TECHNICAL	
Maximum Working Capacity:	400 lbs(181.4 kg)
Working Length:	6 ft.(1.8 m)web lifeline
Weight:	1.9 lbs.(0.86 kg) (Model MFL-16-Z7/6FT)

CERTIFICATIONS
Meets OSHA 1926.502, 1910.66, ANSI A10.32-2012, ANSI Z359.14-2012 Class A and B, CSA Z259.2.2 Type 1 requirements

9-foot TurboLite Specifications

MATERIALS	
Housing:	High-impact Nylon
Webbing:	Vectran core, polyester jacket 1" wide x 0.06" thick (25.4 mm x 1.5 mm)
TECHNICAL	
Maximum Working Capacity:	400 lbs(181.4 kg)
Working Length:	9 ft.(2.7 m) web lifeline
Weight:	3.1 lbs.(1.4 kg)(MFL-17-Z7/9FT)

CERTIFICATIONS
Meets OSHA 1926.502, 1910.66, ANSI A10.32-2012, ANSI Z359.14-2012 Class A and B, CSA Z259.2.2 Type 1 requirements

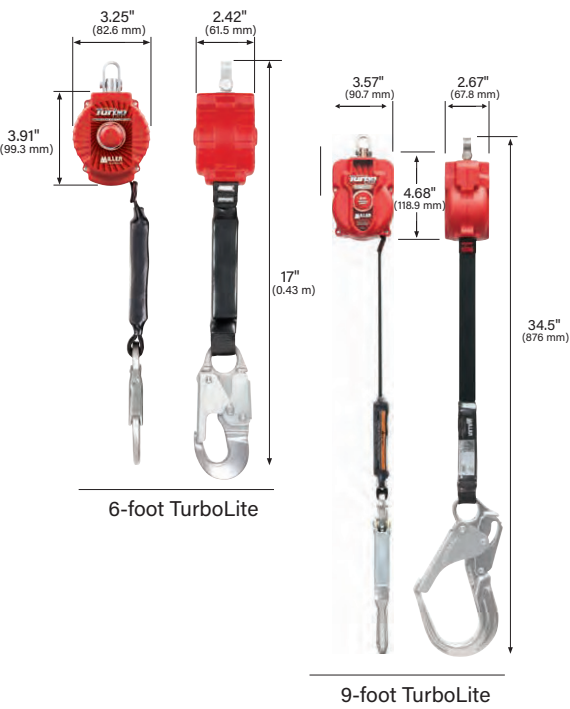

Miller Twin Turbo Fall Protection Systems



EFFECTIVE SOLUTIONS FOR LOW FALL CLEARNACE

- New patent-pending Miller Twin Turbo G2 Connector and patented D-Ring Connector easily adapts two (2) lightweight Miller TurboLite Personal Fall Limiters for continuous 100% tie-off fall protection.
- Better alternative to double-leg lanyards – Reduces fall clearance requirements for use in more applications.
 - PFLs swivel independently – Provides ultimate worker mobility and prevents webbing from twisting and binding in the unit.
 - Meets all applicable OSHA, ANSI, and CSA requirements



MILLER TWIN TURBO FALL PROTECTION SYSTEM With Patent Pending Twin Turbo G2 Connector

	UNIT CONNECTOR	LANYARD END CONNECTOR
TWIN TURBO G2 CONNECTOR AND COMPONENTS		
MODEL	DESCRIPTION	
MFLC/	Twin Turbo G2 Connector Kit	
MFLC-1/	Aluminum Carabiner	
MFLC-2/	G2 Webbing Retainer Clip	
MFLC-3/	G2 D-Pad Connector Clip	

With Patented Twin Turbo D-Ring Connector

	UNIT CONNECTOR	LANYARD END CONNECTOR
6-FT. MODELS		
MFLB-4-Z7/6FT	Twin Turbo D-Ring Connector	Steel Rebar Hooks



MFLC-12-Z7/9FT



MFLB-11-Z7/6FT

Miller Twin Turbo Fall Protection System with G2 Connector PATENT PENDING



- Lightest-weight Twin Connector on the market – Increases productivity by reducing worker fatigue.
- Superior durability – Corrosion-resistant aluminum connector teamed with high-impact nylon result in a longer product life.
- Superior safety – Webbing Retainer Clip rotates freely to prevent unintentional opening of carabiner gate during a fall increasing worker safety.
- D-Pad Clip – Maintains harness adjustment while working by keeping the harness webbing and D-Pad in place (Included option but not required for use.).
- Connects to harness webbing below the D-ring – Frees harness D-ring for rescue and connection to an overhead Self-Retracting Lifeline.
- Webbing Retainer Clip offers generous webbing slot – Accommodates thicker webbing designs for more versatility and allows for easy insertion of webbing.



AUSTRALIA AND NEW ZEALAND

For More Information

www.pipglobalsafety.com | **Contact us**

PIP
GLOBAL SAFETY

© 2025 Protective Industrial Products, Inc.