

Miller Non-Stretch Harnesses

Models: 850 Series



Description

Miller Yellow Non-Stretch harnesses with pull down adjustment are lightweight and durable.



Materials

Minimum Tensile strength

Webbing 1-3/4" Polyester

Minimum Tensile 5000 lbs. on webbing

Thread: 6 cord bonded 3 strand polyester thread.
Minimum tensile of 42 lbs.

Grommets Brass

Hardware Steel

- D-Ring 5000 lbs. (22kN)

- Buckles 4000 lbs. (18kN)

• All hardware meets ASTM (50) fifty-hour salt spray test requirements.

Technical


Max Working Load: 400 lbs -181.4kg

Label Materials: Valeron



Certification

Meets applicable ANSI A10.32, Z359.1; OSHA 1910.66, 1926.502(d); CSA Z259.10-06 requirements

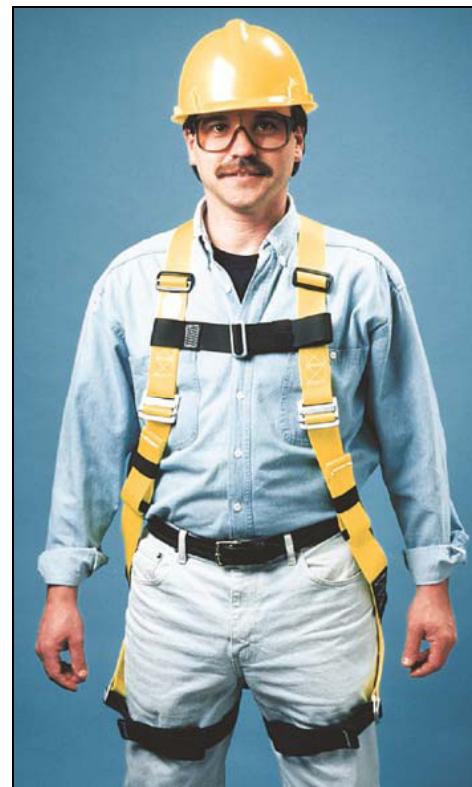

Model	Size	Back D-ring	Front D-ring	Side D-ring	Shoulder Straps	Leg Straps	Chest Strap	Sub-Pelvic Strap	Weight	Special Features
850/UYK	U	Yes	No	No	Friction	Mating	Mating	Yes	3.0lbs (1.4kg)	Pull-free lanyard rings / Fall indicator
850-4/UYK	U	Yes	No	No	Friction	Tongue	Mating	Yes	3.1lbs (1.4kg)	Pull-free lanyard rings

Model numbers listed are for universal size. Harnesses are also available in small/medium and XXlarge, by replacing the "U" in the model number with "S/M" or "XXL". Note: For front D-ring vest-style option, add "FD" to the corresponding harness model number (Ex: 850FD/UYK).

⚠ WARNING: THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.

AUSTRALIA AND NEW ZEALAND

For More Information

www.pipglobalsafety.com | [Contact us](#)

PIP
GLOBAL SAFETY