



Fix Anchor Point

Product description


The MillerFix is a safe and secure anchor point for use in maintenance and roof work. This unit provides minimal visual intrusion ensuring that the unit does not have a negative impact on the aesthetics of the buildings be it commercial or residential.

FEATURES

- Can be used as a Fall Arrest Anchor Point for one person.
- Easy to install.
- The MillerFix can be used as an end anchor point for a Miller Tech line (HLLR2/30FT & HLLR2/60FT), temporary horizontal lifeline assembly.
- For Xenon and other Lines it can be used as a support of intermediates (such as the Xenon 1010609).
- Each unit is fitted with a weather seal and is supplied with mounting rivets.

APPLICATIONS

- Construction/Building
- Roof maintenance
- Any roof work application

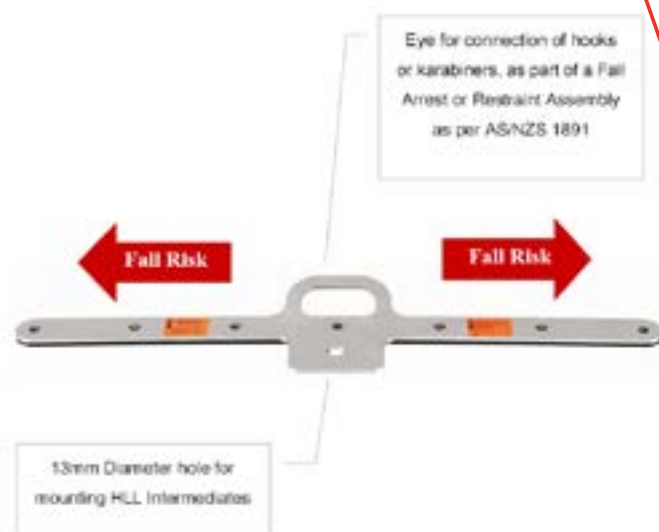

Technical Information

- Manufactured from 3mm Stainless Steel Type 304
- Weight 0.42kg
- Rated to 15kN (when installed as per the manufacturers instructions) for fall arrest for one person.

STANDARDS

If installed as per manufacturer instructions this unit complies with AS/NZS 1891-4, as a Fall Arrest or Restraint Anchor Point.

ORDERING DETAILS

ATTACHMENT POINTS						
PART NO.	DESCRIPTION	MIN QTY	CAT	PACKAGE DIMENSIONS	WEIGHT	BARCODE
M1030055	Fix anchor point	1	A	490 x 120 x 20	420g	9333633010452

WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF PERSONAL PROTECTIVE PRODUCTS AVAILABLE FROM PIP GLOBAL SAFETY AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. PIP GLOBAL SAFETY RECOMMENDS ALL USERS OF ANY PERSONAL PROTECTIVE EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY.

AUSTRALIA AND NEW ZEALAND
For More Information
www.pipglobalsafety.com | [Contact us](#)

PIP
GLOBAL SAFETY